



OUR PRODUCTS

Trailers, compatible swap-body platforms and load aids



Truck turntable-trailers



Truck semi-trailers



Truck tandem-trailers



Truck dolly-trailers



Car and pickup truck trailers



Accessories

TRANSPORTATION SOLUTIONS FOR TIMBER HOUSE CONSTRUCTION

Telescopic, expandable and equipped with a uniform Stanchion system for wall element transport up to 30 t - Our exchange systems and loading aids solve the logistical core problems of modern carpenters and prefabricated timber house builders.

ACCESSORIES

LOADING AIDS

MORE SAFETY AND FLEXIBILITY WHEN SLINGING, EASIER HANDLING DURING INTERNAL LOAD TRANSPORT.



Auwärter – Anhänger und Aufbauten GmbH & Co. KG
 Harlachhammer 2
 D-95679 Waldershof
www.auwaerter.com/en



ONE STEP AHEAD

Clever and cost-effective loading aids

The actual load transport is one thing, the fast and safe internal logistics the other. As a system provider, we have revolutionized the loading aid in close cooperation with carpentry businesses and our international partners.


With the H-Bock, the first side rail for slingers, you can secure your load quickly, safely and without the comparatively inflexible rope securing system. Due to its stable lightweight design, the patented universal loading frame can be installed on all common flatbed swap-body platforms or flatbed trailers in the shortest time. The well thought-out design and foldable middle rails allow efficient use of the entire load volume.

The Transmob in our HF series is a flexible lifting truck: height-adjustable, telescopic and extremely maneuverable with a maneuvering radius of 360 degrees. As a result, even narrow warehouse sections can be accessed easily. Thanks to the standard hydraulic lifting system, you can pick up almost all common swap-body platforms at different heights precisely and continuously.

H-BOCK

Fall arrester

- 1 TELESCOPIC STANCHIONS**
for the best possible load securing
- 2 FOLDING SIDE RAILS**
in stable lightweight design
- 3 LONGITUDINAL BARS (RAILING BARS)**
with lashing possibility
- 4 FLOOR ANCHORS**
Eccentric fixing possible

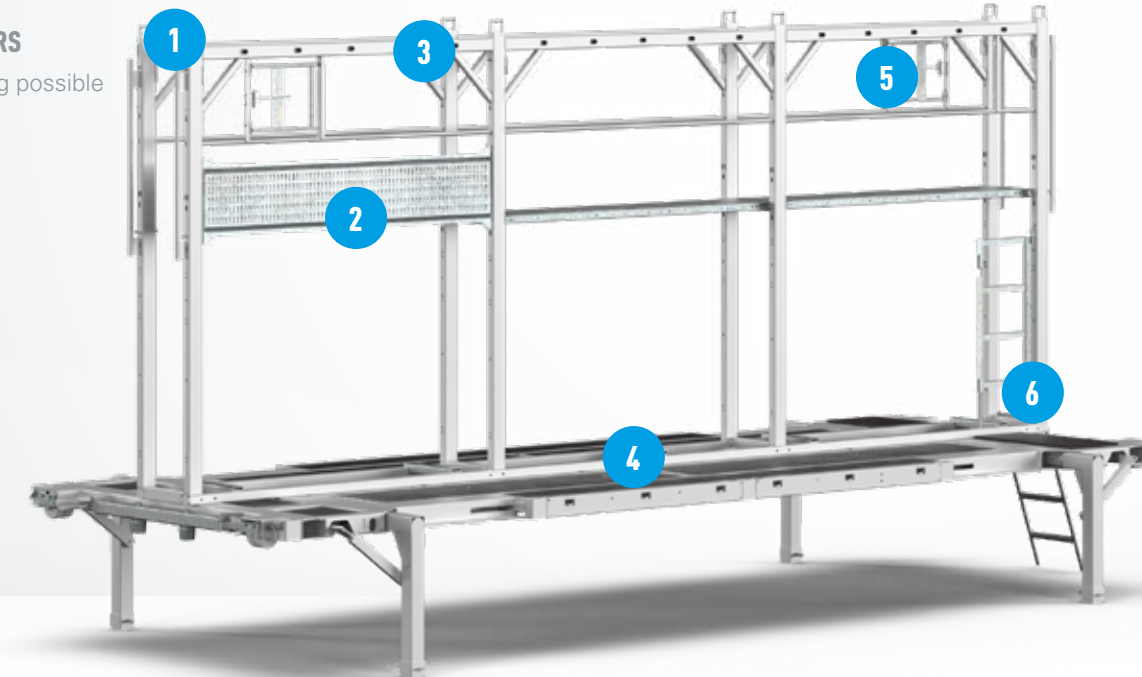

- 5 RESTRAINT SYSTEM**
front and rear with swivel clamp
- 6 LADDER**
swiveling, with storage

TECHNICAL DATA

Compatible universal loading aids in various versions and perfectly matched to your loading requirements.

	H-BOCK 7 M	H-BOCK 9 M		HF15 TRANSMOB	HF24 TRANSMOB
WEIGHT	approx. 680 kg	approx. 880 kg	MAX. PARKING HEIGHT	1,290 mm	1,290 mm
LOAD CAPACITY OF SIDE RAIL	approx. 180 kg	approx. 180 kg	MIN. PARKING HEIGHT	740 mm	740 mm
HEIGHT	approx. 2,820 – 3,220 mm	approx. 2,820 – 3,220 mm	LIFTING HEIGHT	550 mm	550 mm
WIDTH	approx. 530 mm	approx. 530 mm	LIFTING FORCE - STANDARD	15,000 kg	24,000 kg
LENGTH	approx. 7,000 mm	approx. 9,000 mm	OVERALL LENGTH	9,800 mm	9,800 mm

ACCESSORIES



TELESCOPIC STANCHIONS

- > Made of steel, continuously adjustable

STANCHIONS

- > with lashing bracket at the top (adjustable from approx. 2,820 mm to 3,220 mm)




FLOOR ANCHORS

- > with ring nut, for eccentric fastening or bolting to the platform

TRANSMOB

Internal positioning aid

- 1 DRAWBAR**
with forklift mounting and slewing ring
- 2 DRAW TUBES**
continuously extendable by approx. 3,500 mm with automatic cable reel
- 3 20' SEA CONTAINER TRANSPORT FRAME**
includes stops and locking devices
- 4 HYDRAULIC CYLINDER**
for lifting and lowering until the desired pick-up height is reached

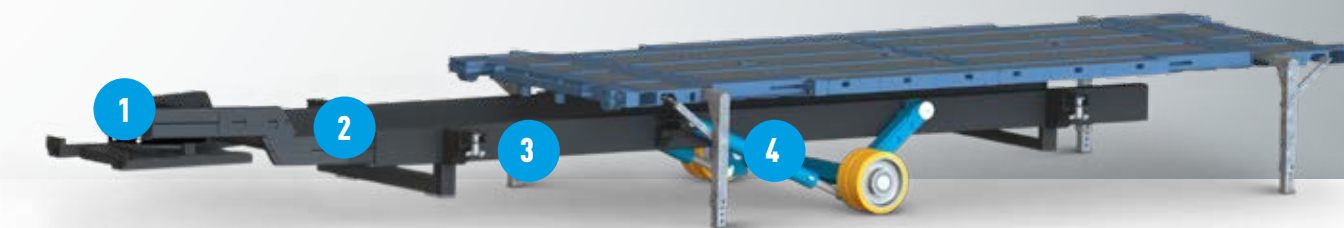

QUICK COUPLING

- > for effortless picking up of the positioning aid by the forklift



GOOSENECK

- > fits standard terminal tractors