

# OUR PRODUCTS

Trailers, compatible swap-body platforms and load aids



Truck turntable-trailers



Truck semi-trailers



Truck tandem-trailers



Truck dolly-trailers



Car and pickup truck trailers



Accessories

## TRANSPORTATION SOLUTIONS FOR TIMBER HOUSE CONSTRUCTION

Telescopic, expandable and equipped with a uniform Stanchion system for wall element transport up to 30 t - Our exchange systems and loading aids solve the logistical core problems of modern carpenters and prefabricated timber house builders.



## CAR AND PICKUP TRUCK TRAILERS

# T35 SERIES

THE ALL-ROUND CAR AND PICKUP TRUCK TRAILER WITH TELESCOPIC EXTENSION – A FLEXIBLE, HIGH QUALITY ENTRY LEVEL FOR YOUR LOGISTICS FLEET.



Auwärter – Anhänger und Aufbauten GmbH & Co. KG  
Harlachhammer 2  
D-95679 Waldershof  
[www.auwaerter.com/en](http://www.auwaerter.com/en)



# KEYFACTS

Things to know about your new Auwärter

The T35 is an extremely versatile telescopic drawbar trailer for cars and pickup trucks. The combination of compact, lightweight construction and high load capacity makes it a flexible all-round solution with variable loading possibilities. Whether as a high (T35O) or low-load (T35) design, the modular construction system with numerous additional functions and equipment such as S stakes or liner supports allow it to be adapted to your transport needs. Thanks to its maneuverability and simple handling, the T35 is particularly convincing for short notice and quick reaction wall transport.

## TECHNICAL DATA

Alongside its low overall weight and the comparatively high load capacity, the T35 car and pickup truck telescopic trailer adapts flexibly to your transport needs.

	T35 (LOWLOADER)	T35O (HIGHLOADER)
GROSS WEIGHT	3,500 kg	3,500 kg
LENGTH OVERALL STANDARD	approx. 5,900 mm	approx. 5,900 mm
PAYLOAD STANDARD	approx. 2,500 kg	approx. 2,500 kg
CLEAR PLATFORM WIDTH	approx. 2,050 mm	approx. 2,050 mm
CLEAR PLATFORM LENGTH	approx. 4,150 mm	approx. 4,150 mm
LOADING HEIGHT LOW-BED (LOADED)	approx. 460 mm	
TIRES	185 R 14 C	185 R 14 C
WIDTH IN LOW-BED	1.250 mm	
LOAD HEIGHT (ABOVE THE WHEELS)	approx. 750 mm	approx. 750 mm

# FEATURES

### 1 ADJUSTABLE DRAWBAR CLAMP

for telescopic extension, locking or clamping, applicable for load height above the wheels

### 2 TELESCOPIC EXTENSION

Drawbar can be pulled out by hand, to implement load lengths of up to 12 m (depending on equipment)

### 3 HIGH OR LOW-BED LOADING DESIGN

for a maximum load height of up to 3.6 m

### 4 ROLLERS

maintenance-free rollers for the V drawbar

### 5 LOAD SECURING

using specially developed X stake pockets and 2x1 load securing rings on the side in the outer frame



## ADVANTAGES


- Modular extendable construction system
- Can be used extremely flexibly even in the base version
- Rigid, lightweight construction with hot-dip galvanized V drawbar
- Can be extended 3 – 4 m by hand with integrated cable roller for the lighting cable
- Length pre-selection locking pins for various extension lengths
- EPD coating (sand blasted, cathodic immersion priming, coating in RAL colors)

## ACCESSORIES



### EXTENSION OF BED AND TELE-DRAWBAR

- Clear platform length approx. 5,150 mm, giving V drawbar extension approx. 4,000 mm
- Clear platform width approx. 2,250 mm

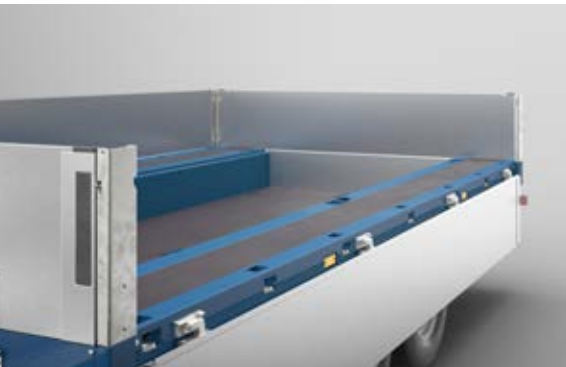

### DROP SIDES

- Drop sides up 400 mm high, drop sides down in low bed, out of aluminum hollow sections in each case, anodized, retractable and removable.

### FLOOR PANELS FOR A COMPLETELY LEVEL PLATFORM

- 5 rigid floor panels in lightweight construction out of corrugated aluminum, lockable, weight per panel approx. 15 kg

### X STAKES (TRANSPORT STANCHIONS)

- Hot-dip galvanized rectangular tube stanchion, wedge shaped for optimal load securing of wall elements, with eccentric closure and lashing bracket at the top. Height approx. 2,700 mm, can be inserted centrally and on the outside, also fit all other Auwärter trailer models

### LINER SUPPORTS

- Cross members with lashing bars and stanchion bars 60x60 mm, lockable, hot-dip galvanized

### LOW-BED DROP SIDES

- Front and rear drop sides for low bed out of aluminum hollow sections, anodized

### DRAWBAR CLAMP

- Hot-dip galvanized for optimal load securing

### LOADING RAMPS

- With parking supports at the rear secured with pins

### CROSS MEMBER

- Cross members with lashing bars and stanchion bars 60x60

### S STAKES

- QuRo 60x60 mm secured with pins, height approx. 1,200 mm – 2,000 mm