

OUR PRODUCTS

Trailers, compatible swap-body platforms and load aids



Truck turntable-trailers



Truck semi-trailers



Truck tandem-trailers



Truck dolly-trailers




Car and pickup truck trailers



Accessories

TRANSPORTATION SOLUTIONS FOR TIMBER HOUSE CONSTRUCTION

Telescopic, expandable and equipped with a uniform Stanchion system for wall element transport up to 30 t - Our exchange systems and loading aids solve the logistical core problems of modern carpenters and prefabricated timber house builders.

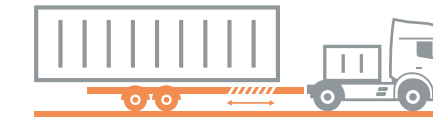

TANDEM TRAILERS

X-LTL SERIES

ECONOMICAL ENTRY-LEVEL TRAILER FOR CARPENTRY BUSINESSES AND TIMBER HOUSE BUILDERS.



Auwärter – Anhänger und Aufbauten GmbH & Co. KG

Harlachhammer 2
D-95679 Waldershof

www.auwaerter.com/en

KEYFACTS

Things to know about your new Auwärter

Our X-LTL series fulfills all the demands on an entry-level trailer for modern timber house construction transport. It is inexpensive, keeps its value and is extremely maneuverable. Even inexperienced drivers can position the tandem platform trailer simply and under control. A further advantage: the complete combination can even be driven with the old class 3 driving license.

The X-LTL has a telescopic middle drawbar that can be extended by up to 4 m. As a result, there is a free drawbar length of up to 6 m. A solid 8.9 t payload and individual load securing options, make this center-axle trailer one of our best sellers.

FEATURES

1 LINEAR DESIGN OF DRAWBAR

can be extended manually by approx. 4x1 m

2 PRE-SELECTION LOCKING PINS

with automatic length pre-selection

3 X STAKE POCKETS


for transport securing, possibility to insert X stake (transport stanchion)

4 HEAVY DUTY LOAD-SECURING RINGS

for lashing vehicles with rubber tires such as lifting platforms or telescopic forklifts

5 2X1 LOAD SECURING RINGS

in the outer frame for maximum load safety even with wide transports

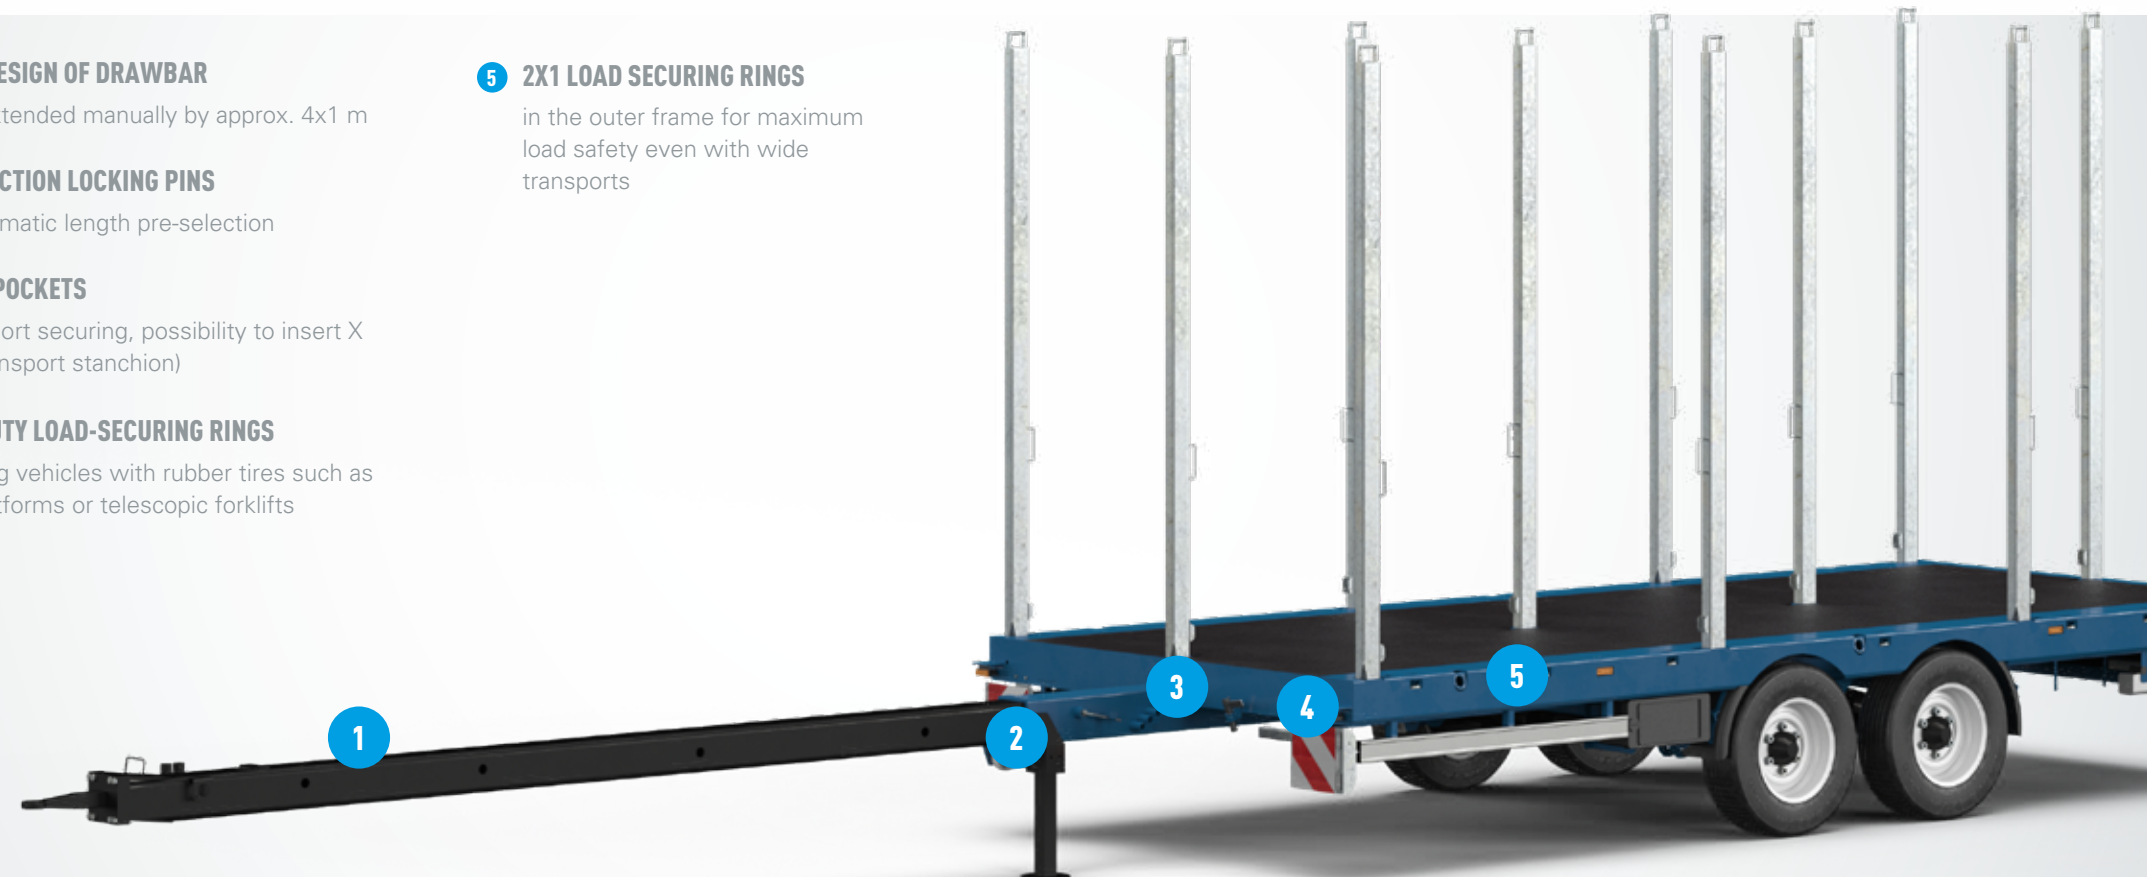

ADVANTAGES

- > An economical comprehensive solution with low depreciation
- > High maneuverability and simple positioning
- > Linear design of drawbar (can be extended manually by 4x1 m) with integrated guide rollers and locking pins for pre-selected lengths
- > Up to 6 m free drawbar length
- > Load height loaded from approx. 840 mm
- > EPD coating (sand blasted, cathodic immersion priming, coating in RAL colors)

TECHNICAL DATA

An economical all-round trailer with a solid payload, a practical low design and a whole lot of loading space above.

	X-LTL110	X-LTL130	X-LTL160
GROSS WEIGHT	11,400 kg	13,000 kg	16,000 kg
PLATFORM WIDTH	approx. 2,550 mm	approx. 2,550 mm	approx. 2,550 mm
PLATFORM LENGTH	approx. 6,000 mm	approx. 6,000 mm	approx. 6,000 mm
PAYLOAD STANDARD	approx. 8,900 kg	approx. 10,500 kg	approx. 12,500 kg
FLOOR HEIGHT	approx. 850 mm (loaded)	approx. 860 mm (loaded)	approx. 860 mm (loaded)
TIRES	235 / 75 R 17.5	235 / 75 R 1.,5	Dual 215 / 75 R 17.5

ACCESSORIES



TURNTABLE SYSTEM

- > Designed for X-LTL and truck
- > Longitudinal storage on the truck
- > Stake supports with lashing bars
- > Stake height between 600-800 mm, hinged



SAFETY PACKAGE

- > Oversized warning signs front and rear
- > Side LED lighting
- > Perimeter LED lighting that can be plugged in at the rear

X STAKE (TRANSPORT STANCHION)

- > Hot-dip galvanized rectangular tube stanchion, wedge shaped for optimal load securing of wall elements, with eccentric closure and lashing bracket at the top
- > Height approx. 2,700 mm
- > Can be inserted centrally and on the outside
- > Fits all other Auwärter trailer models

LOW-BED CARRIER

- > Side low-bed carrier for transport heights of 3,800 mm

DRIVE-ON FLOOR

- > Parking supports at back left and right, heavy duty load-securing rings for chain lashing

ADAPTER

- > Change without tools in approx. 5 minutes, with 40 mm towing ring and screw plate

DROP SIDES

- > Removable and foldable from the sides, height 400 mm - 600 mm, removable corner stakes

AIR SUSPENSION

- > With raising and lowering - twin axle unit

STORAGE BOX FOR LOADING RAMPS

- > For all Auwärter trailers in the X-LTL series

LOADING RAMPS

- > For safe vehicle use and loading